


Laminex® High Pressure Laminates

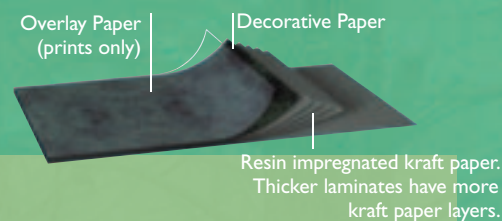

- Laminex® High Pressure Laminates are made from layers of Kraft paper impregnated with phenolic thermosetting resins to make up the product core and melamine impregnated decorative paper to make up the surface layer, manufactured under high pressure and temperature.
- High Pressure Laminates (HPL) are designed for use as decorative surfaces for a wide range of applications including benches, worktops, wall linings, furniture and joinery in interior applications.
- They are very durable decorative surfaces with a high wear, scratch and moisture resistance.
- Laminex High Pressure Laminate is a 0.7mm thick laminate designed to allow heat forming with specialist equipment to create internal and external curves as tight as 10mm radius.
- There is a large choice of colour options available.
- Various surface finishes are available to deliver specific visual, tactile and wear properties for selected products and colours.
- Laminex HPL has low VOC and formaldehyde emissions for better indoor air quality.
- A commercially viable and environmentally preferable range of products without compromising design flexibility.
- Laminex High Pressure Laminates have been awarded the Good Environmental Choice Australia Licence.
- Laminex High Pressure Laminates are made to meet or exceed the requirements of AS/NZS 2924.1:1998
 - High Pressure Decorative Laminates

PRODUCT	THICKNESS	FINISH OPTIONS	COLOUR RANGE
Laminex HPL	0.7mm	3	Refer to current product availability chart

For technical product information refer to The Laminex Group Product Catalogue or visit www.thelaminexgroup.co.nz



Laminex High Pressure Laminates are licenced by GOOD ENVIRONMENTAL CHOICE AUSTRALIA.

Printed on recycled paper. Image courtesy of Forest Products Commission.

Laminex®
Inspire your space

Wood Fibre Sources

The Laminex Group has several suppliers of paper for use in the manufacture of High Pressure Laminates. All suppliers to The Laminex Group use wood pulp sourced from sustainable managed plantations.

There are three types of paper used in the manufacture of High Pressure Laminates:

- (i) Kraft paper is used to construct the core of the laminate. –
– Kraft paper comes from suppliers in the USA and Scandinavia.
- (ii) Solid colour and Printed paper – This is sourced from suppliers in Europe, USA and Asia.

Paper suppliers source wood pulp from timber plantations certified under one of the following programs:

- FSC (Forest Stewardship Council International)
- PEFC (Pan European Forest Council)
- SFI (Sustainable Forestry Initiative USA)

Wood species include:

- USA – Elder, Ash and Pine
- Europe & Scandinavia – Birch, Spruce and Pine
- South America – Eucalypt

The Laminex Group specifies the use of ECF – Elemental Chlorine Free bleached pulp for decorative papers. Heavy metals are not present in the colouration pigments used for paper supplied to The Laminex Group.

Product Stewardship

The Laminex Group is committed to exploring commercially viable environmental programs, and is investigating processes and technologies to collect and re-use its products after the end of their serviceable lives. At present a commercial means of recovering and recycling high pressure laminates in Australia & New Zealand does not exist.

Reduced Emissions for Better Indoor Air Quality

- The Laminex Group uses Phenolic Formaldehyde resins in the manufacture of high-pressure laminates. The formaldehyde emission levels are very low and easily meet the European E1 limit.
- Laminex High Pressure Laminates emit formaldehyde well below the workplace exposure limit set by the Ministry of Health and comply with the voluntary standards of Good Environmental Choice Australia.
- Laminex High Pressure Laminates emit very low traces of VOCs (Volatile Organic Compounds).

Product Durability

- The serviceable life of the product will depend on its application. When stored, handled, used and maintained in accordance with current technical literature, the product will meet the durability requirements of NZBC B2.3.1 (c)

Modularity & Flexibility

- The standard sheet sizes of Laminex High Pressure Laminates are developed to meet the practical requirements for typical furniture, joinery and wall lining applications, so that waste can be kept to a minimum.
- Benchtops, worktops and surfaces decorated with Laminex High Pressure Laminates can be refurbished, reused or easily replaced.